

Overview:



- Quick and easy to install
- Pre-set hydraulic damping
- Adjustable gas closing force
- Opening angle: up to 110°


Dimensions:

Replacement Gate Closer (GC-22-300N-B): Suitable for gates weighing up to 80kg.

Material: Black powder coated cylinder
Ceramic coated piston rod
Plastic covertube
Zinc plated angle joints

Temp. range: -20 to +80 DegC

Force: 300N

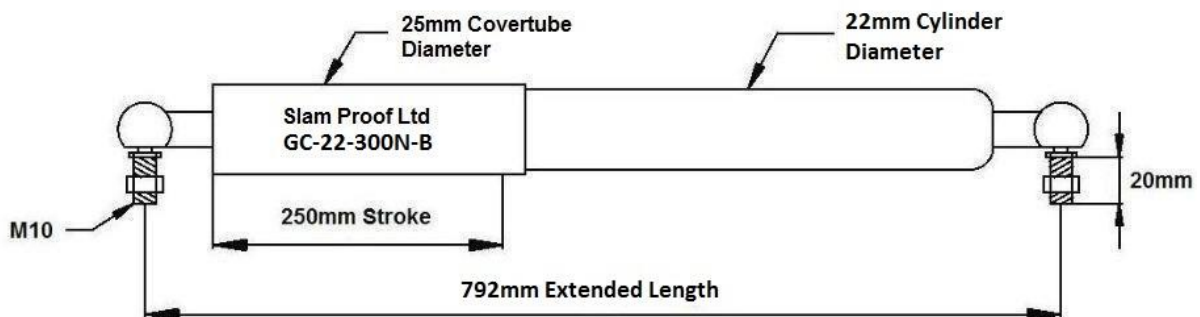

Closing Force Adjustment:



1. Remove the angle joint fitted to the gate closer cylinder.
2. Hold the gate closer with the valve end pointing upwards.
3. Slowly screw the adjustment tool onto the threaded end. When you hear the nitrogen gas escape, immediately turn the adjustment tool in the opposite direction to avoid too much gas being released. Recommended to release gas in small bursts (less than 1 second). **Damage can be caused by screwing the adjustment tool too far into the valve.**
4. After adjusting, unscrew the adjustment tool and securely reattach the angle joint.
5. Test the gate closer in the application and if necessary repeat the above procedure.

Use AT-10 adjustment tool.

If too much gas is released, gate closer will need to be returned for refilling. Please contact info@slamproof.co.uk